


BASIC 3%



blanco
white
300-3% **12372916**

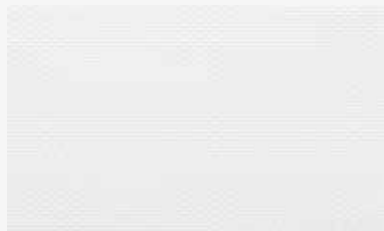


blanco puro
pure white
300-3% **12372910**



blanco/lino
white/linen
300-3% **12372991**




beige
beige
300-3% **12372115**

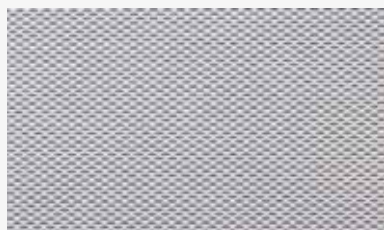

blanco/gris
white/grey
300-3% **12372992**



gris medio
medium gray
300-3% **12372916**

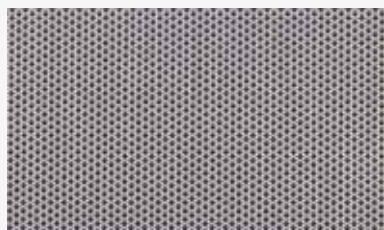

grafito
graphite
300-3% **12372991**



negro
black
300-3% **12372115**



chocolate
chocolate
300-3% **12372713**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecnici	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / Peso / وزن	440 g/m² ± 10 %				
Ancho / Width / Largeur / Largura / Larghezza / عرض	300 cm				
Espesor / Thickness / Épaisseur / Espessura / Spessore / سماكة	0,65 mm ± 0,05				
Largo del rollo / Roll length / Longueur du rouleau / Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ± 5 %				
Composición / Composition / Composition / Composição / Composizione / التركيبة	70% PVC 30% polyester				
Resistente al fuego / Fire resistance / Résistance au feu / Resistência ao fogo / Resistente al fuoco / مقاوم النار	FR NFPA701(USA) M1 - CLASE 1 UNE-EN 13773:2003				
Factor de Apertura / Openness Factor / Facteur d'ouverture / Fator de Abertura / Fattore di apertura / عامل الانفتاح	3%				
Urdimbre / Warp / Chaîne / Urdidura / Ordito / Trama / Weft / Trame / Trama / Trama	54 44				
Resistencia a la tensión / Tensile strength / Résistance à la traction / Resistência à tração / Resistenza alla trazione / قوة الشد		180 daN/5 cm 143 daN/5 cm DIN53354:1981	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama		
Resistencia al rasgado / Tearing strength / Résistance à la déchirure / Resistência ao rasgamento / Resistenza allo strappo / مقاومة التمزق		34,6 daN 30,4 daN DIN53363:2003	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama		
Medio ambiente / Environment / Environnement / Medio ambiente / Ambiente / بيئة		OEKO-TEX 100 GREENGUARD			
Resistencia del color / Colour fastness / Résistance de la couleur / Resistência da cor / Resistenza del colore / ثبات اللون		8 grade SGS			
UV-A Factor		97 %			