

# GLASS



blanco  
white  
300-5% **12328916**  
250-5% **12349916**




blanco/beige  
white/beige  
300-5% **12328114**  
250-5% **12349114**



beige  
beige  
300-5% **12328115**  
250-5% **12349115**




chocolate  
chocolate  
300-5% **12328814**  
250-5% **12349814**

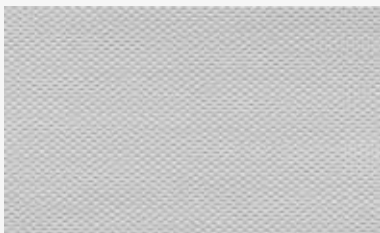


blanco/gries  
white/grey  
300-5% **12328747**  
250-5% **12349747**



gris  
gris  
300-5% **12328740**  
250-5% **12349740**

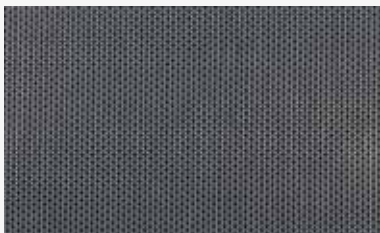

gris oscuro  
dark gray  
300-5% **12328743**  
250-5% **12349743**

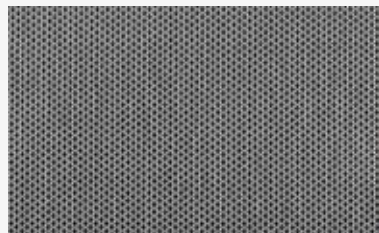

gris/negro  
grey/black  
300-5% **12328746**  
250-5% **12349746**



negro  
black  
300-5% **12328911**  
250-5% **12349911**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecnici	Características técnicas	خصائص تقنية
<b>Peso / Weight / Poids / Peso / Peso / وزن</b>	<b>393 g/m<sup>2</sup> ±5 %</b>		<b>Resistencia del color / Colour fastness</b> Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون	<b>7-8</b> Escala de azules Scale of blue	
<b>Ancho / Width / Largeur</b> Largura / Larghezza / عرض	<b>250 - 310 cm</b> ver muestras		<b>Termosoldable / Thermo welding allowed / Thermoscellable</b> Termoselável / Saldabile / قابل للحام		
<b>Espesor / Thickness / Épaisseur</b> Espessura / Spessore / سماكة	<b>0,40 mm ±5 %</b>		<b>Limpiar con agua jabonosa / Clean with soapy water</b> Nettoyer à l'eau savonneuse / Limpe com água e sabão Pulire con acqua saponata / تنظيف بالماء والصابون		
<b>Largo del rollo / Roll length / Longueur du rouleau</b> Comprimento do rolo / Lunghezza del rotolo / طول اللفة	<b>30 m ±5 %</b>		<b>Resistencia a la tensión</b> Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	<b>Urdimbre / Warp</b> Chaîne / Urdidura <b>Trama / Weft</b> Trame / Trama <b>200 daN/5 cm</b> <b>220 daN/5 cm</b>	
<b>Composición / Composition / Composition</b> Composição / Composizione / التركيبة	<b>64% PVC</b> <b>36% fiberglass</b>		<b>Resistencia al rasgado</b> Tearing strength Résistance à la déchirure Resistência ao rasgamento Resistenza allo strappo مقاومة التمزق	<b>Urdimbre / Warp</b> Chaîne / Urdidura <b>Trama / Weft</b> Trame / Trama <b>7,9 daN</b> <b>8,4 daN</b> DIN53363:2003	
<b>Resistente al fuego / Fire resistance</b> Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	<b>FR NFPA701:2010</b> <b>CLASE 2</b> UNE-EN 13773:2003 <b>M2</b> UNE23.727-90 <b>B1</b> ÖNORM_B_3820				
<b>Factor de Apertura / Openness Factor</b> Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	<b>5%</b>				
<b>Medio ambiente / Environment</b> Environnement / Medio ambiente Ambiente / بيئة	<b>OEKO-TEX 100</b>				

## GLASS



**Reflexión solar (Rs)**  
**Transmisión solar (Ts)**  
**Transmisión de la luz (Tv)**  
 Solar reflection (Rs)  
 Solar transmission (Ts)  
 Light transmission (Tv)  
 Réflexion solaire (Rs)  
 Transmission solaire (Ts)  
 Trans, lumineuse (Tv)  
 Reflexão solar (Rs)  
 Transmissão solar (Ts)  
 Transmissão de luz (Tv)  
 Riflessione solare (Rs)  
 Trasmissione solare (Ts)  
 Trasmissione della luce (Tv)  
 الانعكاس الشمسي (Rs)  
 النقل الشمسي (Ts)  
 انتقال الضوء (Tv)

Col. claros **Rs: 50-70%**  
 Light colours **Ts: 12-18%**  
 Couleurs claires **Tv: 10-18%**  
 Cores claras  
 Colori chiari  
 الألوان الفاتحة  
 Col. oscuros **Rs: 06-30%**  
 Dark colours **Ts: 06-10%**  
 Couleurs foncées **Tv: 06-09%**  
 Cores escuras  
 Colori scuri  
 الألوان الداكنة