


ONESCREEN



blanco
white
250-1% **12291900**

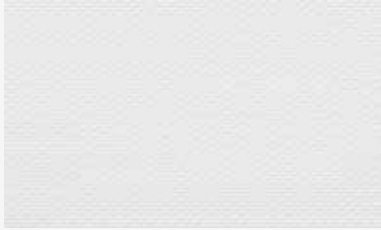

marfil
ivory
250-1% **12291103**



bronce
bronze
250-1% **12291125**



gris
gray
250-1% **12291867**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecnici	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / Peso / وزن	500 g/m² ±10 %			Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	216 daN/5 cm
Ancho / Width / Largeur Largura / Larghezza / عرض	250 cm			Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	103 daN/5 cm DIN53354:1981
Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,64 mm ±5 %			Resistencia al rasgado Tearing strength Résistance à la déchirure Resistência ao rasgamento Resistenza allo strappo مقاومة التمزق	27,5 daN 10,8 daN DIN53363:2003
Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	27,4 m ±5 %			Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	OEKO-TEX 100
Composición / Composition / Composition Composição / Composizione / التركيبة	70% PVC 30% polyester			Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	
Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	1%			NO termosoldable, cinta refuerzo o costura NO thermo welding, reinforcement tape or seam PAS Thermoscellable, ruban de renfort ou couture NO Termosselável, fita de reforço ou costura NON saldabile, finforzo o nastro adesivo غير قابل للحام مع تعزيز أو شريط التماس	