




TOUCH 1%

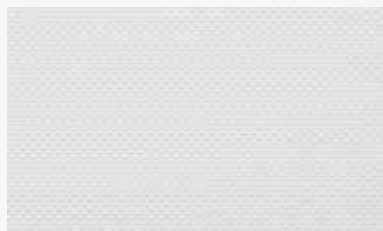


blanco
white
300-1% **12214401**
250-1% **12206401**

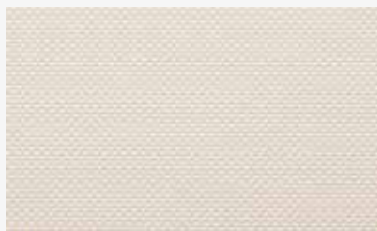

crema
cream
300-1% **12214402**
250-1% **12206402**

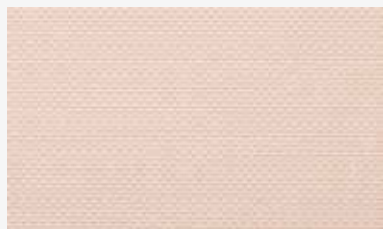

beige
beige
300-1% **12214448**
250-1% **12206448**

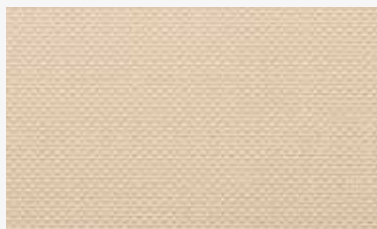

camel
camel
300-1% **12214415**
250-1% **12206415**




blanco-gris
white grey
300-1% **12214403**
250-1% **12206403**



gris medio
medium gray
300-1% **12214414**



gris oscuro
dark gray
300-1% **12214406**

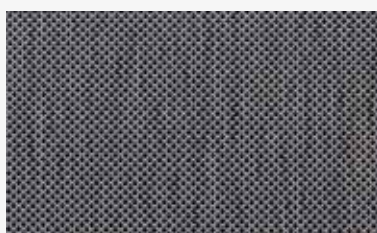

grafito
graphite
300-1% **12214405**



negro
black
300-1% **12214407**

Características técnicas Technical characteristic Caractéristiques technique Caratteristiche tecnici Características técnicas خصائص تقنية

	Peso / Weight / Poids / Peso / وزن	460 g/m² ±5 %
	Ancho / Width / Largeur Largura / Larghezza / عرض	250 - 300 cm ver muestras
	Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,58 mm ±5 %
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	27 m ±5 %
	Composición / Composition / Composition Composição / Composizione / التركيبة	70% PVC 30% polyester
	Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701(USA) M1 - CLASE 1 UNE-EN 13773:2003
	Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	1%
	Urdimbre / Warp / Chaîne / Urdidura / Ordito Trama / Weft / Trame / Trama / Trama	48 48

	Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	OEKO-TEX 100
	Imprimible / Printable / Imprimable Imprimível / Stampabile	HP Latex printer tested
	Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء	AATCC 16-2003 Class 4.5 After 80 AFU
	UV-A Factor UV-B Factor	93,59 % 95,28 %
	Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama 329 daN/5 cm 410 daN/5 cm