


blackout



BLACKOUT COLLECTION

SCREEN BLACKOUT

Para estor enrollable y panel japonés

For roller blinds and panel tracks

Pour stores enrouleur et panneaux japonais

Para estores de rolo e painéis deslizantes

Per tende a rullo e tende a pannelli

للسنائر الدوارة واللوحات اليابانية




BLACKOUT COLLECTION


SCREEN BLACKOUT

300 **12363916**
blanco: tras. blanca
white: white back

Ancho **Referencia completa** / Width **Full product code**
Nombre del color
Colour name

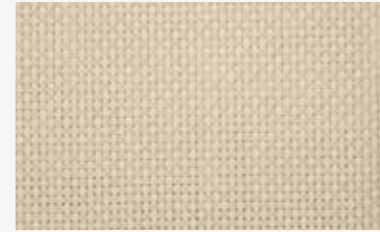

300 **12363991**
blanco-lino: tras. blanca
white-linen: white back

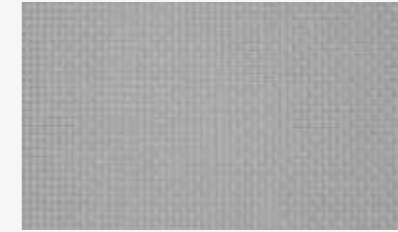













300 **12363992**
blanco-gris: tras. blanca
white-grey: white back

BLACKOUT COLLECTION

SCREEN
BLACKOUT

Características técnicas
Technical characteristics
Caractéristiques techniques
Características técnicas
Caratteristiche tecniche
خصائص تقنية

 Peso / Weight / Poids / Peso / Peso / وزن	550 g/m² ±5 %
 Ancho / Width / Largeur Largura / Larghezza / عرض	300 cm
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,65 mm ±5 %
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±5 %
 Composición / Composition / Composition Composição / Composizione / التركيبة	70 % PVC 30 % polyester
 Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء	AATCC 16-2003 Class 4.5 After 80 AFU
 Opacidad / Opacity / Opacité Opacidade / Opacità / عموض	100 %
 Urdimbre / Warp / Chaîne / Urdidura / Ordito Trama / Weft / Trame / Trama / Trama	48 46
 Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	GREENGUARD
 Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701:2010
 NO termosoldable. Unión con cinta de refuerzo o costura NOT thermo welding. Weld with reinforcing tape or seam PAS Thermoscellable. Union avec ruban de renforcement ou couture NO Termoselável. Selar com fita de reforço ou costura NON termosaldatura. Saldare con nastro di rinforzo o cucitura غير قابل للحام مع تعزيز أو شريط التماس	
 No utilizar terminal oculto / Don't use hidden bottom rail Ne pas utiliser le rail inférieur caché / Não use trilho inferior oculto Non utilizzare la guida inferiore nascosta	

Color of
the Year
2019

PANTONE®

Living Coral
16-1546