


screen 5%



SCREEN PREMIUM COLLECTION

GLASS

Para estor enrollable y panel japonés
For roller blinds and panel tracks
Pour stores enrouleur et panneaux japonais

Para estores de rolo e painéis deslizantes
Per tende a rullo e tende a pannelli

للمستائر الدوارة واللوحات اليابانية




SCREEN PREMIUM COLLECTION

GLASS

310-5% **12328916**
250-5% **12349916**
blanco
white


Ancho-FA **Referencia completa** / Width-OF **Full product code**
Nombre del color
Colour name

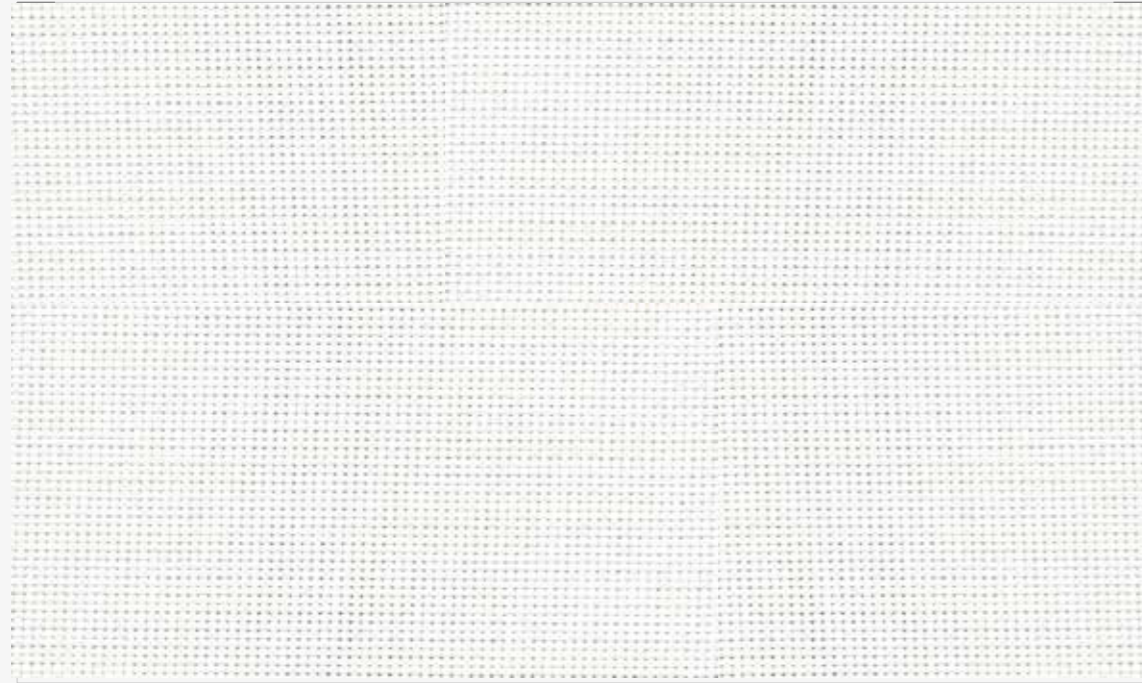


310-5% **12328114**
250-5% **12349114**
marfil
ivory




310-5% **12328115**
250-5% **12349115**
beige

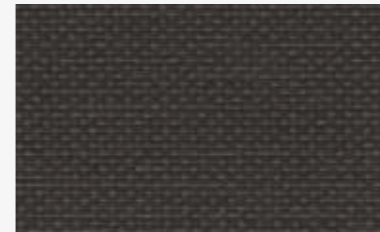

310-5% **12328814**
250-5% **12349814**
chocolate

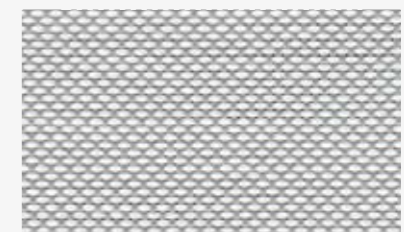

310-5% **12328747**
250-5% **12349747**
gris claro
light grey

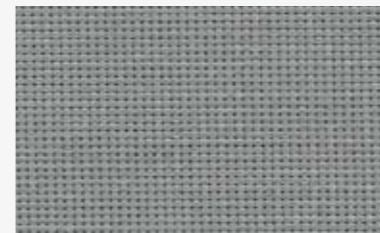


310-5% **12328740**
250-5% **12349740**
gris medio
mid grey



310-5% **12328743**
250-5% **12349743**
gris oscuro
dark grey



310-5% **12328746**
250-5% **12349746**
black&white

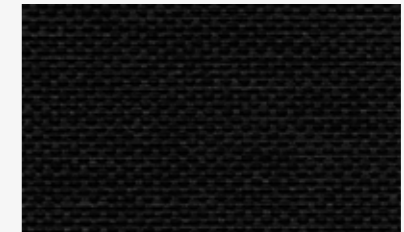














310-5% **12328911**
250-5% **12349911**
negro
black

SCREEN PREMIUM COLLECTION

GLASS

Características técnicas
Technical characteristics
Caractéristiques techniques
Características técnicas
Caratteristiche tecniche
خصائص تقنية

 Peso / Weight / Poids / Peso / Peso / وزن		393 g/m² ±5 %
 Ancho / Width / Largeur Largura / Larghezza / عرض		250 - 310 cm ver muestras
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة		0,40 mm ±5 %
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة		30 m ±5 %
 Composición / Composition / Composition Composição / Composizione / التركيبة		64% PVC 36% fiberglass
 Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار		FR NFPA701:2010 CLASE 2 UNE-EN 13773:2003 M2 UNE23.727-90 B1 ÒNORM_B_3820
 Factor de Apertura / Openess Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح		5%
 Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة		OEKO-TEX 100
 Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون		7-8 Escala de azules Scale of blue
 Termosoldable / Thermo welding allowed / Thermoscellable Termoselável / Saldabile / قابل للحام		
 Limpiar con agua jabonosa / Clean with soapy water Nettoyer à l'eau savonneuse / Limpe com água e sabão Pulire con acqua saponata / تنظيف بالماء والصابون		
 Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	200 daN/5 cm 220 daN/5 cm
 Resistencia al rasgado Tearing strength Résistance à la déchirure Resistência ao rasgamento Resistenza allo strappo مقاومة التمزق	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	7,9 daN 8,4 daN DIN53363:2003
 Reflexión solar (Rs) Transmisión solar (Ts) Transmisión de la luz (Tv)	Col. claros Light colours Couleurs claires Cores claras Colori chiari الألوان الفاتحة	Rs: 50-70% Ts: 12-18% Tv: 10-18%
Solar reflection (Rs) Solar transmission (Ts) Light transmission (Tv)	Col. oscuros Dark colours Couleurs foncées Cores escuras Colori scuri الألوان الداكنة	Rs: 06-30% Ts: 06-10% Tv: 06-09%
Réflexion solaire (Rs) Transmission solaire (Ts) Trans. lumineuse (Tv)		
Reflexão solar (Rs) Transmissão solar (Ts) Transmissão de luz (Tv)		
Riflessione solare (Rs) Trasmisione solare (Ts) Trasmisione della luce (Tv)		
الانعكاس الشمسي (Rs) النقل الشمسي (Ts) انتقال الضوء (Tv)		



Mejor opción / Best choice

CONTRACT

Especialmente recomendado, por sus características ignífugas y excelente resistencia, para instalar en el sector de la hostelería y espacios de gran concurrencia: Hoteles, Restaurantes, Puntos de atención al público, Bibliotecas, Espacios sociales y culturales, Centros sanitarios, Teatros, Auditorios, etc.

CONTRACT

Especialmente recommended, for its fire retardant and excellent resistance characteristics, for installing in the hotel and catering industry and spaces of great concurrence: Hotels, Restaurants, Front office, Libraries, Social and Cultural areas, Health centers, Theaters, Auditoriums, etc.

Color of
the Year
2019

PANTONE®

Living Coral
16-1546